




OVERHEAD UNIPANEL

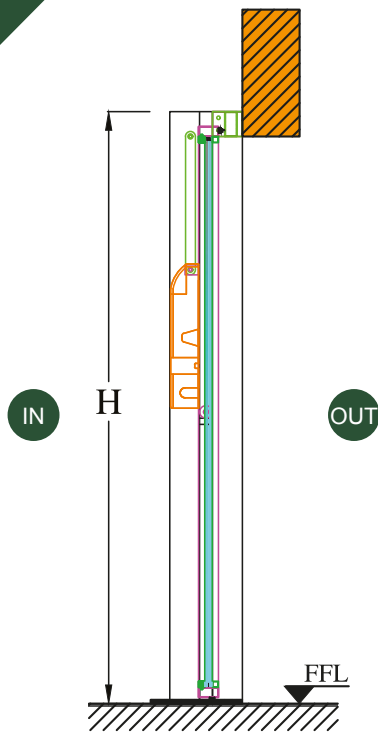

Side View (Closed)

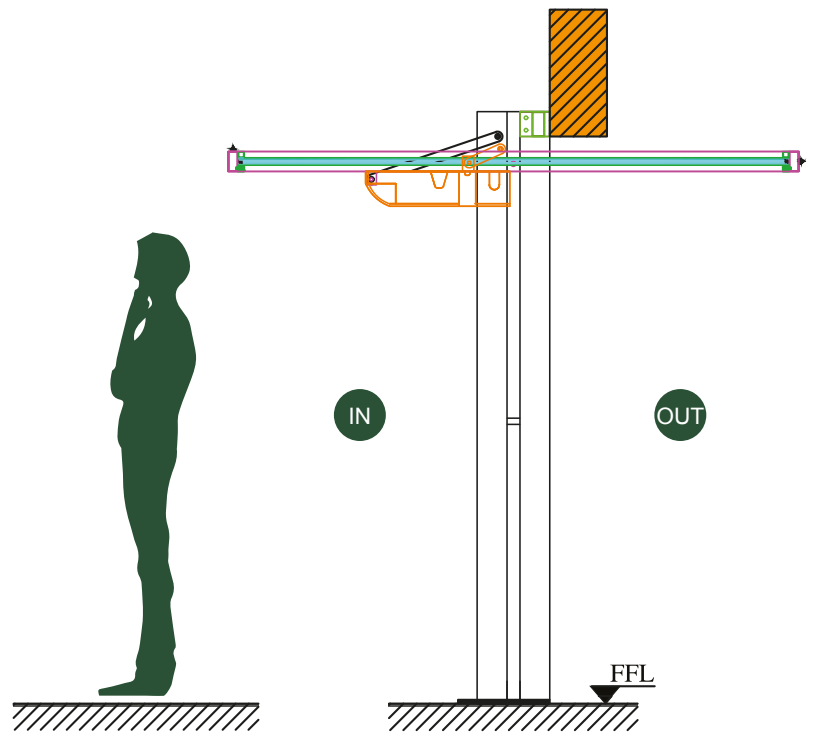

Side View (Open)

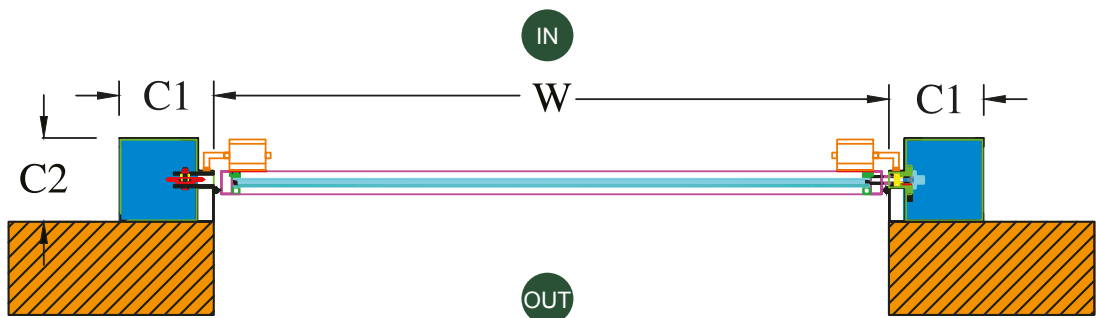

Top View

W Meters	H Meters	C1 mm	C2 mm
1 to 3.5	<3	300	320

- 1 Remote controlled
- 2 Smooth and silent
- 3 Opening and closing time: 27 seconds
- 4 Watertight & Airtight
- 5 Clear, tempered simple glass of thickness 8 or 12 mm or double glazing tempered-laminated (8/12/10)
- 6 Equipped with safety brakes

Scan for Video



UAE - Taleb Systems FZCO:
International Free Zone Authority FZCO,
Dubai Silicon Oasis, DDP, Building A2,
Dubai, UAE.
Tel: +971 54 791 6020/+971 54 378 8320
P.O. Box: 451906
E-mail: sales@talebsystems.ae
Website: www.talebsystems.ae


Saudi Arabia - Al Khatib Contracting Establishment:
8484 Al Qandeel Street,
Al Aziziyah District, Jeddah 23334,
Saudi Arabia.
Tel: +966 50 558 8693/+966 53 706 5766
E-mail: talebsystems@alkhatibcontracting.com
Website: www.talebsystems.ae

Lebanon - Taleb & Co:
Demco Tower A, Office 1303, Antelias.
Tel: +961 4 520 317
Offices & Factory:
Taleb Center, Amioun.
Tel: +961 6 651 181 • Fax: +961 6 950 651
E-mail: sales@talebandco.com
Website: www.talebandco.com






OVERHEAD BARSET

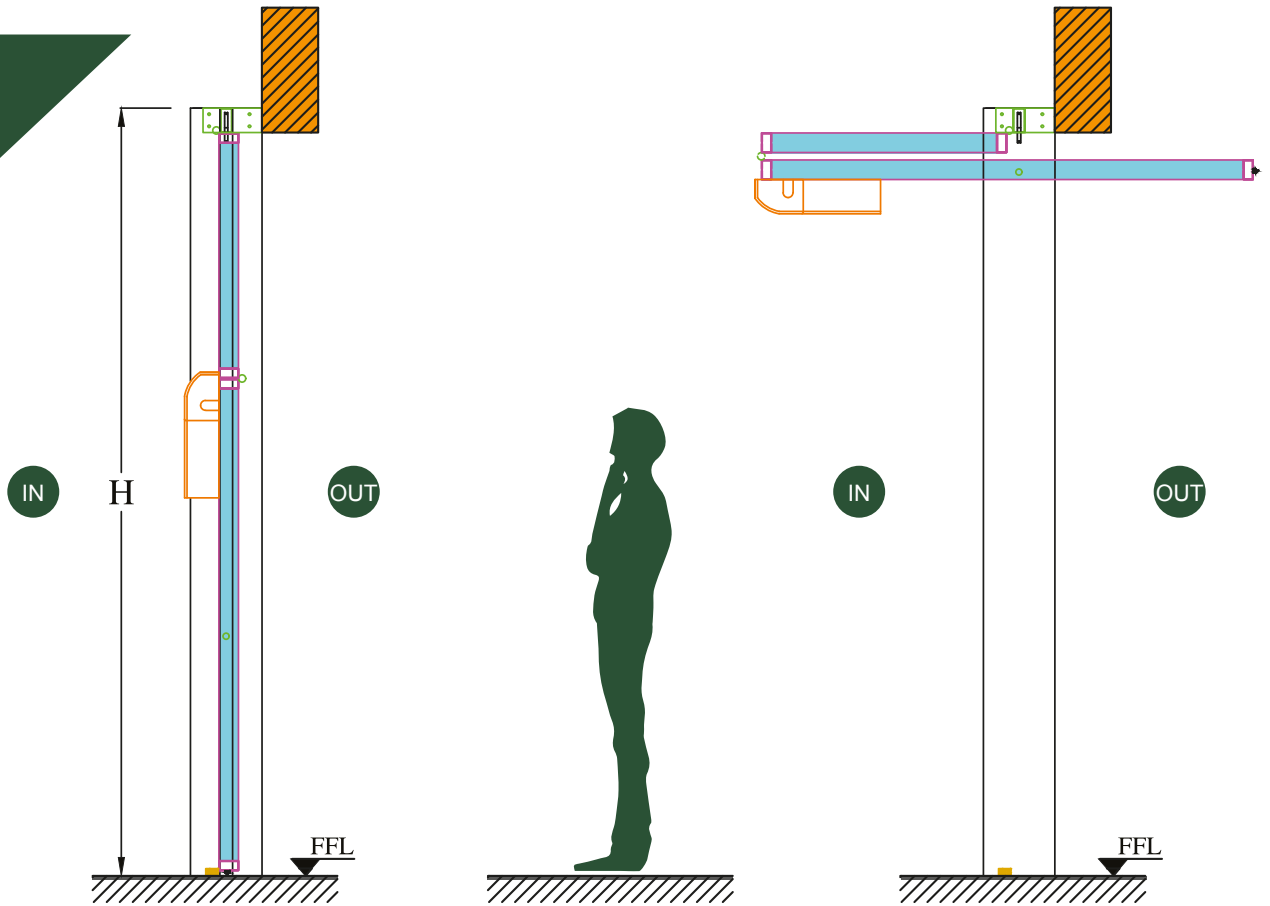

Side View (Closed)

Side View (Open)

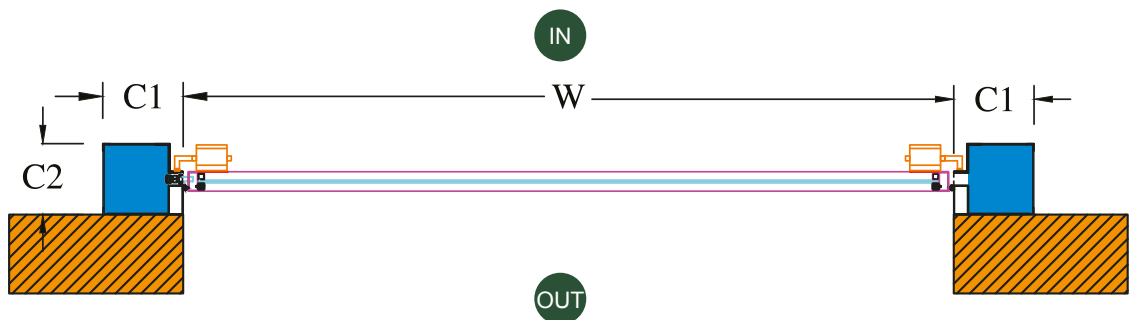

Top View

W Meters	H Meters	C1 mm	C2 mm
1 to 4	2 to 3	300	320
4 to 6	2 to 3	400	320
6 to 8	2 to 3	400	320
>8	Special Design		

- 1 Remote controlled
- 2 Smooth and silent
- 3 Opening and closing time: 27 seconds
- 4 Watertight & Airtight
- 5 Clear, tempered simple glass of thickness 8 or 12 mm or double glazing tempered-laminated (8/12/10)
- 6 Equipped with safety brakes


Scan for Video






TALEB SYSTEMS

BI-FOLD DOOR

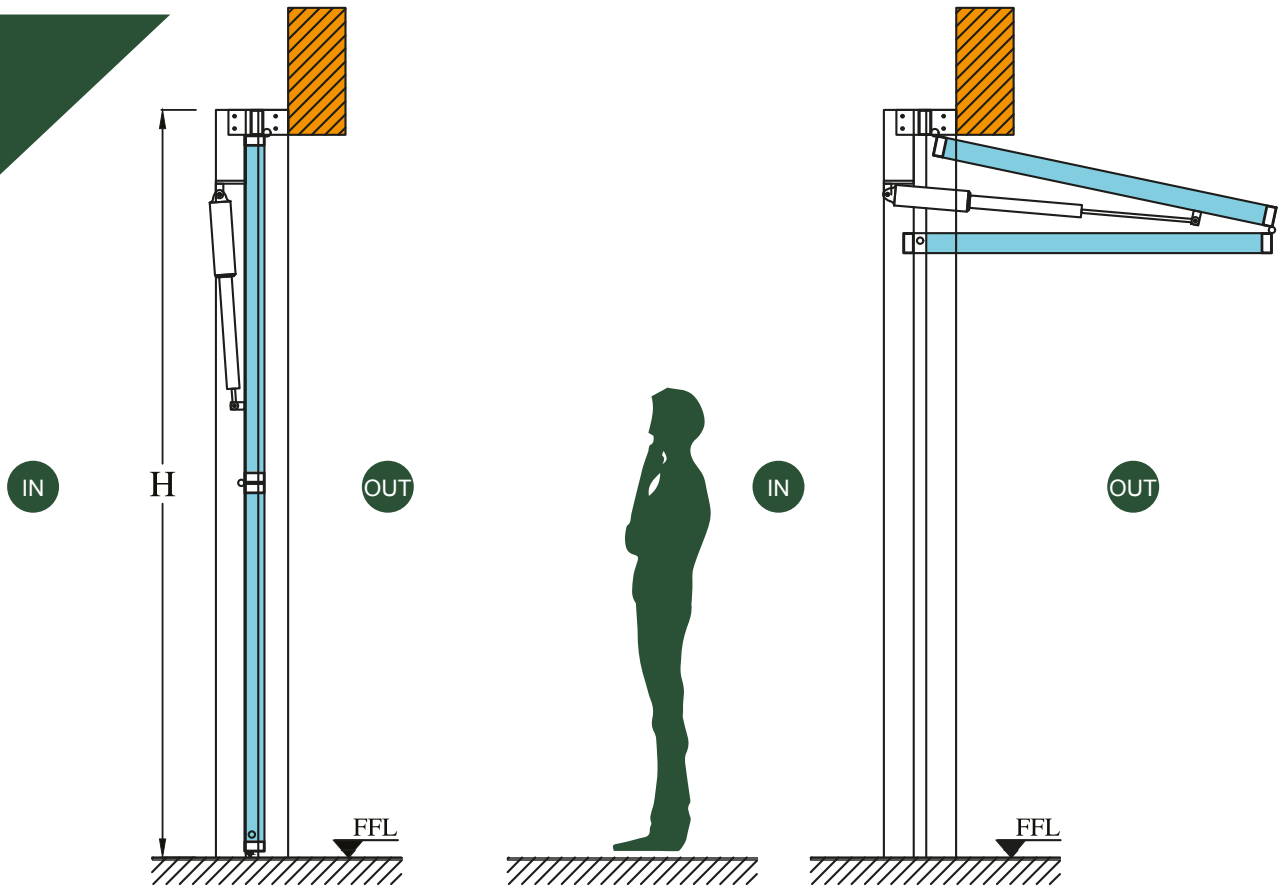

Side View (Closed)

Side View (Open)

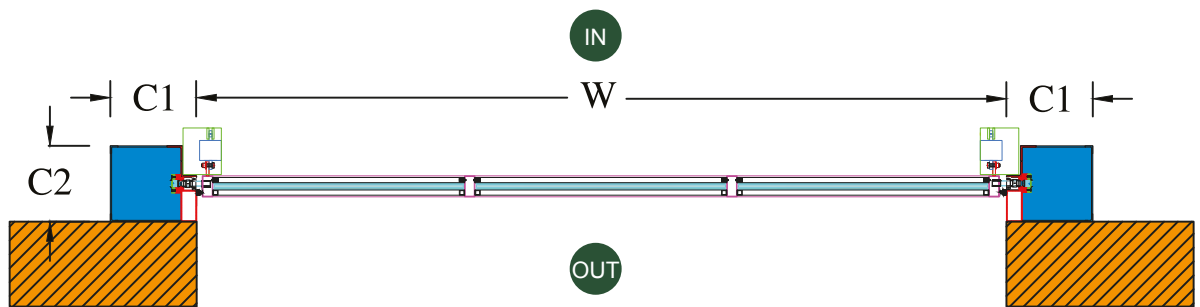

Top View

W Meters	H Meters	C1 mm	C2 mm
2 to 4	2 to 4	320	320
4 to 6	2 to 3	400	400
> 6*	> 3	100	200

* Hydraulic Pistons are used
No need for counterweight boxes

- 1 Remote controlled
- 2 Smooth and silent
- 3 Opening and closing time: 45 seconds
- 4 Watertight & Airtight
- 5 Clear, tempered simple glass of thickness 8 or 12 mm or double glazing tempered-laminated (8/12/10)
- 6 Equipped with safety brakes

Scan for Video

