





BI-FOLD DOOR

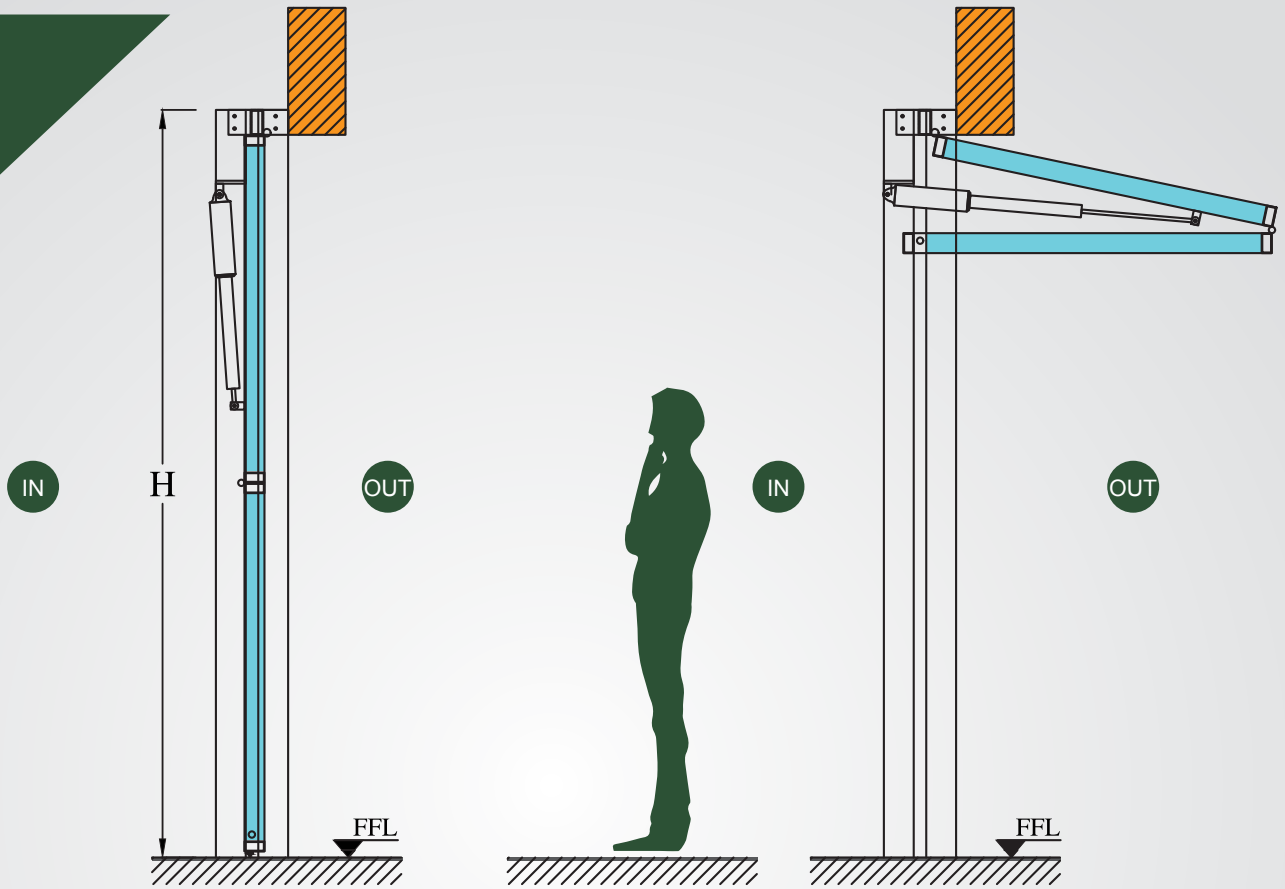

Side View (Closed)

Side View (Open)

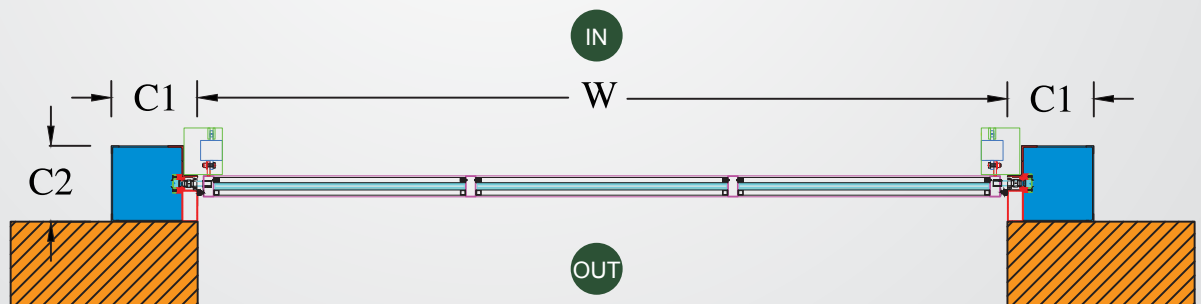

Top View

W Meters	H Meters	C1 mm	C2 mm
2 to 4	2 to 4	320	320
4 to 6	2 to 3	400	400
> 6*	> 3	100	200

* Hydraulic Pistons are used
No need for counterweight boxes

- 1 Remote controlled
- 2 Smooth and silent
- 3 Opening and closing time: 45 seconds
- 4 Watertight & Airtight
- 5 Clear, tempered simple glass of thickness 8 or 12 mm or double glazing tempered-laminated (8/12/10)
- 6 Equipped with safety brakes

Scan for Video

